



LGH-RX5-E Commercial Series

This commercially orientated system can be utilised virtually anywhere.

Key Features

- Effective fresh air ventilation
- High heat recovery
- Free cooling function
- Good sound attenuation
- “Hyper Eco Core”. At only 25µm the Lossnay core uses one of the thinnest papers in the world to achieve high enthalpy exchange efficiency
- The Lossnay-5-FSC Interface can also be used with LGH-RX5-E units
- However, automatic fan speed control is with 3 speeds
- Total heat exchange (sensible and latent)




Fresh Air Ventilation

Product Information

LGH-RX5-E Commercial Series

Making a
World of
Difference

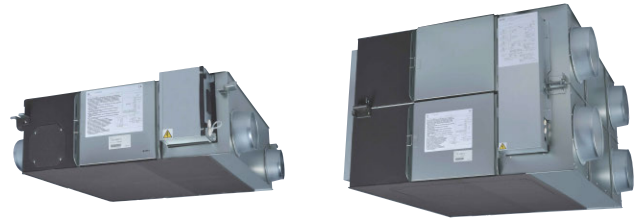

FEATURES



Auto-Restart



Standard filter



Optional high efficiency filter

COMMERCIAL MODELS		LGH15RX5-E	LGH25RX5-E	LGH35RX5-E	LGH50RX5-E	LGH65RX5-E	LGH80RX5-E	LGH100RX5-E	LGH150RX5-E	LGH200RX5-E	
ELECTRICAL POWER SUPPLY		220-240V, 50Hz									
STARTING CURRENT (A)		0.8	0.9	2.4	3.0	4.4	3.8	4.6	7.3	11.9	
RUNNING CURRENT (A)	Extra Low	0.15	0.18	0.30	0.40	0.60	0.65	0.90	-	-	
	Low	0.25	0.27	0.51	0.85	1.20	1.45	1.70	2.90	3.40	
	High	0.38	0.48	0.74	1.00	1.50	1.60	2.10	3.20	4.20	
	Extra High	0.46	0.55	0.92	1.25	1.80	1.75	2.40	3.50	4.80	
INPUT POWER (W)	Extra Low	35	42	69	95	140	145	200	-	-	
	Low	59	62	116	190	265	340	380	680	785	
	High	90	114	169	228	322	370	475	740	980	
	Extra High	110	129	212	286	380	415	535	830	1100	
AIRFLOW (m ³ /h) ^{*1}	Extra Low	70	105	115	180	265	355	415	-	-	
	Low	110	155	210	390	520	700	755	1300	1580	
	High / Extra High	150	250	350	500	650	800	1000	1500	2000	
AIRFLOW (l/s) ^{*1}	Extra Low	19	29	32	50	74	99	115	-	-	
	Low	31	43	58	108	144	194	210	361	439	
	High / Extra High	42	69	97	139	181	222	278	417	556	
EXTERNAL STATIC PRESSURE (Pa)	Extra Low	14	9	9	10	8	20	18	-	-	
	Low	40	25	30	60	50	95	60	100	65	
	High	70	60	80	90	80	120	110	135	105	
	Extra High	105	85	160	155	120	150	170	175	165	
SOUND PRESSURE LEVEL (dBA)	Lossnay	Extra Low	18	19	18	19	22	22	22	-	-
		Low	23.5	21.5	23	28	31.5	31	32.5	35	34
		High	27	26	29.5	32	33	33	35	37.5	38
		Extra High	28	27	32	34	34.5	34.5	37	39	40
	Bypass	Extra Low	19	19	18	19	22.5	22	22	-	-
		Low	24	22	24	29	30.5	32	33	37	35
		High	28	26.5	30.5	32.5	33.5	34	36	39	39
		Extra High	29	27.5	32.5	35	35	35.5	38	40.5	41
TEMPERATURE EXCHANGE EFFICIENCY (%)	Extra Low	85.5	83.5	88	86	86	87.5	87	-	-	
	Low	84	81.5	85	81	80	80.5	83	81	83	
	High	82	79	80	78	77	79	80	80	80	
	Extra High	82	79	80	78	77	79	80	80	80	
ENTHALPY EXCHANGE EFFICIENCY (%)	Heating	Extra Low	81	77.5	81.5	78	78	79.5	80	-	-
		Low	77.5	74	76.5	71	70.5	72.5	74	72.5	73.5
		High / Extra High	75	69.5	71.5	69	68.5	71	72.5	72	72.5
	Cooling	Extra Low	81	76	81	77	77	79.5	79	-	-
		Low	76.5	72.5	75.5	68	68.5	71.5	73	71.5	72
		High / Extra High	73	68	71	66.5	66	70	71	70.5	71
WEIGHT (kg)	20	20	29	32	40	53	59	105	118		
DIMENSIONS (mm)	Width	735	735	874	1016	954	1004	1231	1004	1231	
	Depth	780	780	888	888	908	1144	1144	1144	1144	
	Height	273	273	315	315	386	399	399	798	798	
DUCT SIZE (mm)	100	150	150	200	200	250	250	250	(SA,RA)250 (O,EA) 270x700	(SA,RA)250 (O,EA) 270x700	
STANDARD FILTER ²	EU-G3	EU-G3	EU-G3	EU-G3	EU-G3	EU-G3	EU-G3	EU-G3	EU-G3	EU-G3	
FUSE RATING (BS88) – HRC (A)	6	6	6	6	6	6	6	6	10	16	
MAINS CABLE NO. CORES	3	3	3	3	3	3	3	3	3	3	

*1 Airflow tested to Japan industrial standards JIS B 8628. *2 EU-F7 filter available as optional parts

USER FRIENDLY REMOTE CONTROLLER



PZ-60DR

- Control up to 15 Lossnay units
- Dot matrix display
- Weekly timer (ability to pre-set air volume requirements at different intervals)
- Night purge function



Telephone: 01707 282880

email: ventilation@meuk.mee.com web: www.airconditioning.mitsubishielectric.co.uk

UNITED KINGDOM Mitsubishi Electric Europe Living Environmental Systems Division
Travellers Lane, Hatfield, Hertfordshire, AL10 8XB, England General Enquiries Telephone: 01707 282880 Fax: 01707 278881
IRELAND Mitsubishi Electric Europe Westgate Business Park, Ballymount, Dublin 24, Ireland
Telephone: Dublin (01) 419 8800 Fax: Dublin (01) 419 8890 International code: (003531)

Country of origin: United Kingdom – Japan – Thailand – Malaysia. ©Mitsubishi Electric Europe 2013. Mitsubishi and Mitsubishi Electric are trademarks of Mitsubishi Electric Europe B.V. The company reserves the right to make any variation in technical specification to the equipment described, or to withdraw or replace products without prior notification or public announcement. Mitsubishi Electric is constantly developing and improving its products. All descriptions, illustrations, drawings and specifications in this publication present only general particulars and shall not form part of any contract. All goods are supplied subject to the Company's General Conditions of Sale, a copy of which is available on request. Third-party product and brand names may be trademarks or registered trademarks of their respective owners.



Effective as of February 2013



www.greengateway.mitsubishielectric.co.uk

Mitsubishi Electric's commitment to the environment



Follow us @green_gateway



Connect with Green Gateway



mitsubishielectric2